Explosion Proof Enclosure



JBR... Series

Technical Data

II 2 GD EEX d IIC IP68

Compliance with essential health and safty requirements has assured by compliance with:

EN 60079-0 EN 60079-1 EN 60079-11

EN 60079-26 EN 61241-0 EN 61241-1

Features

JBR/W... series aluminium alloy enclosures are used both as junction enclosures with or without terminals and to install other electrical equipment such as switches, indicators, section switches, remote control switches and transformers.


Enclosures can be drilled and threaded according to customer is specifications.


More Option

Plate terminals and Terminals rail, Land electrical devices such as Swithes, Signal lamps, Push buttons and etc. Wiring according to drawing and technical consultant it's necessary.

www.alka.ir

Dimensions (mm) External Dimension			
	Α	В	С
JBR/W 1	150	150	150
JBR/W 2	220	220	150
JBR/W 3	280	280	200
JBR/W 4	450	450	200
JBR/W 5	560	560	250
JBR/W 6	700	700	250

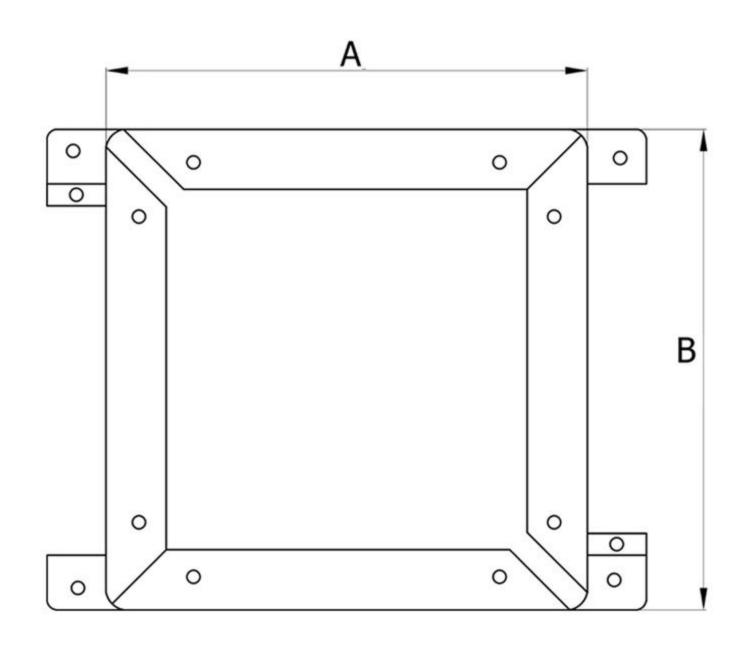

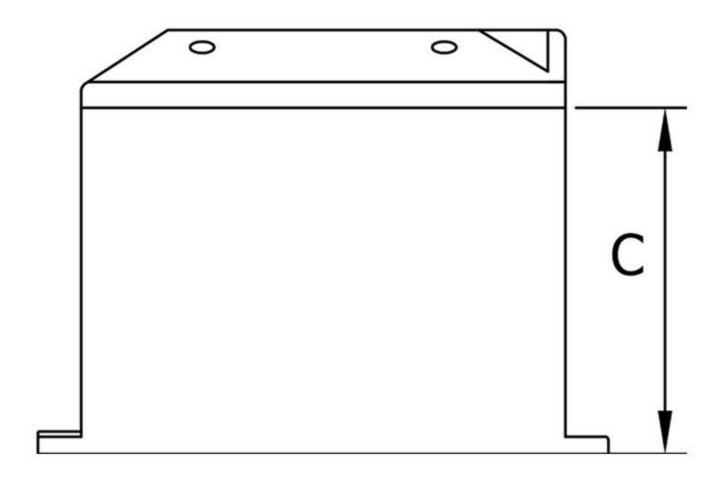

www.alka.ir